



ACCMMR electronic control

ACCMMR allows to connect up to two MMI user interface giving them therequired power supply.

ACCMMR has 24Vac or 230Vac power supply and DIN rail mounting

Protection degree




CAN bus



General features

ACCMMR	
Features	Value
OTHERS	
Internal protection device	PTC thermistor
CANbus	•
Dimensions (DIN modules)	4
Mounting	DIN bar


Connection diagram

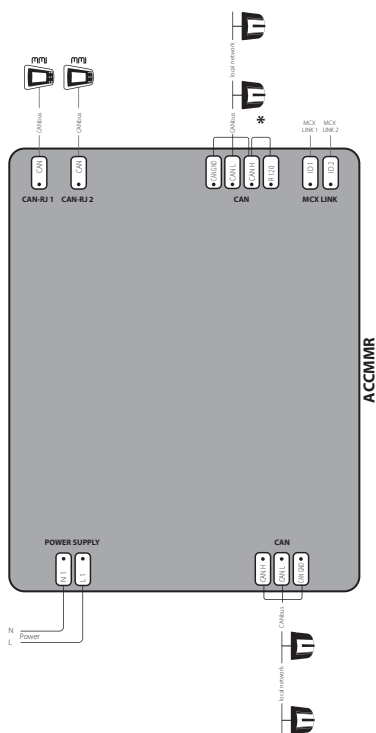

*NOTE: connection has to be made on the first and last local network units, make the connection as close as possible to the connector


Dimensions

NO DISPLAY

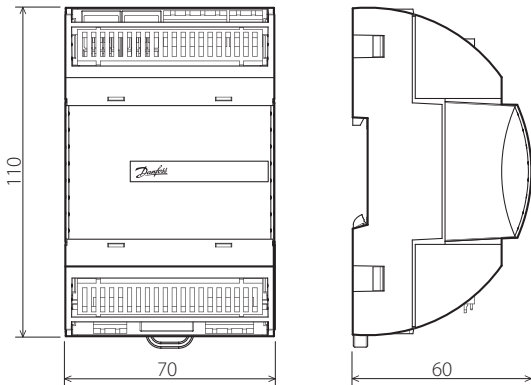


Network diagram

MMIGRS REMOTE CONNECTION

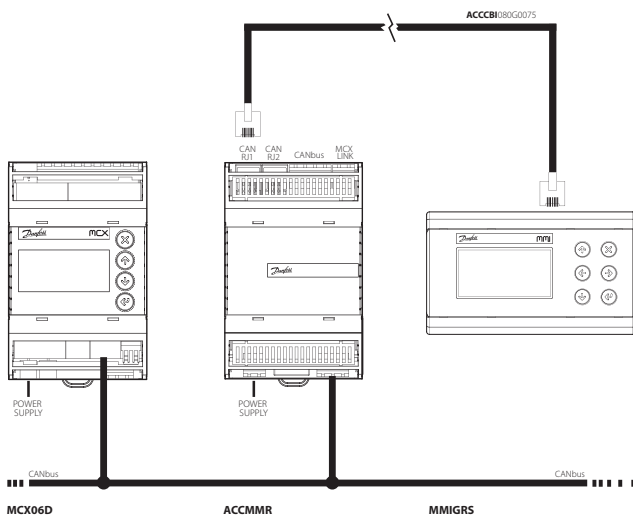

DIRECT CONNECTION BETWEEN MMIGRS AND MCX06

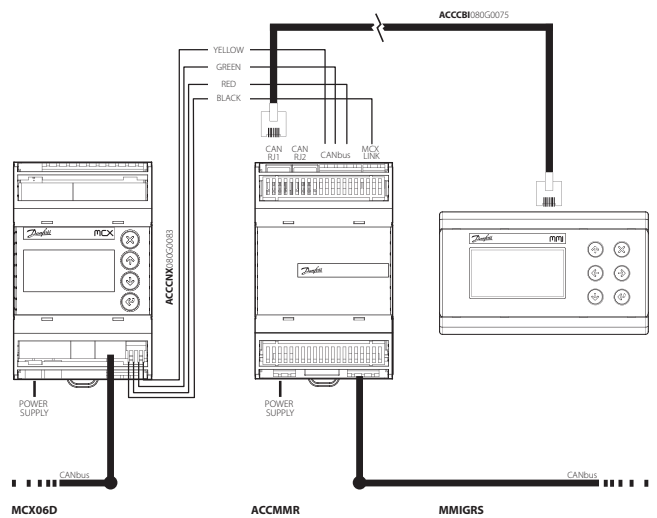

Product part number

ACCMMR

CODE **	DESCRIPTION
080G0011	ACCMMR, 24V, S
080G0052	ACCMMR, 230V, S

**NOTE: single pack codes (S) include standard kit connectors.
Is also available industrial pack codes (I) that don't include standard kit connectors



Danfoss Electronics spa

Viale Venezia, 59
31020 San Vendemiano
(TV) Italy

Tel: +39 0438 336611
Fax: +39 0438 336699

info@danfosselectronics.com
www.danfosselectronics.com